

**Product: High Power Optical Isolator**


Part Number	Spec Number	Version	Date
HISOXXXXXXXXXXXX	S067	Rev 01	11/02/2023

**1 Specifications**

Item	Parameters	Symbol	Value	Units	Note
1.	Center Wavelength ( $\lambda_c$ )	$\lambda_c$	1940 or Specify	nm	
2.	Operating Wavelength Range	$\lambda_{op}$	$\lambda_c \pm 10$	nm	
3.	Typ. Insertion Loss, 23 °C	IL	0.8	dB	
4.	Max. Insertion Loss, 23 °C	IL	1.2	dB	
5.	Typ. Peak Isolation, 23 °C	IS	30	dB	
6.	Min. Isolation, $\lambda_c$ , 23 °C	IS	26	dB	
7.	Max. Polarization Dependent Loss, 23 °C	PDL	0.2	dB	
8.	Min. Return Loss	RL	50	dB	
9.	Max. Optical Power	Pop	60	W	
10.	Max. Peak Power for ns Pulse	Pp	10	kW	
11.	Fiber Type		BD-G25/250-11FA or Specify		
12.	Operating Temperature	Top	10 to 50	°C	
13.	Storage Temperature	Tstor	0 to 60	°C	

Note:

**2 Drawings**

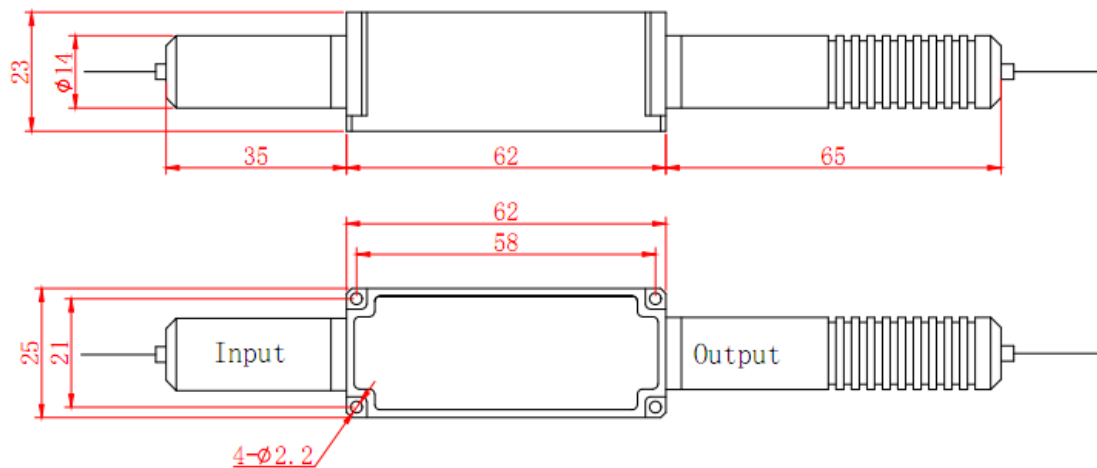

**3 Device Label, Delivery Data, RoHS Requirement**

Triple-Stone standard format. RoHS compliant.

**4 Order Information**

HISO-1-2-3-4-5-6-7

1.	Wavelength	1940 - 1940 nm, 1950 - 1950 nm, 2000 - 2000 nm, SSSS - Specify
2.	Handling Power	30 - 30 W, 40 - 40 W, 50 - 50 W, SS - Specify
3.	Fiber Type	1 - LMA-GDF-25/250-09M, 2 - BD-G25/250-11FA, 3 - LMA-GDF-25/400-09M, 4 - SM-GDF-10-130-15M, S - Specify
4.	Fiber Length	1 - 1.0 m, S - Specify
5.	Jacket Type	B - Bare fiber, L - 900 $\mu$ m loose tube, S - Specify
6.	Connector Type	N - None, S - Specify
7.	Power Type	C - Continuous Wave, P - Pulse Application